www.m2bswitches.com

RL-61-F-RE-P6-0-N-21(8)A

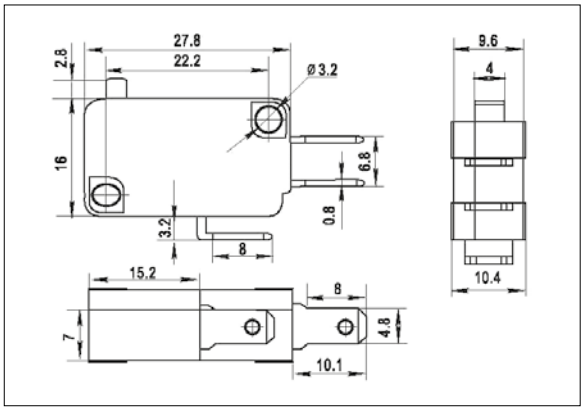

21(8)A 250V T85 1E4
16(4)A 250V T125 1E4
16(4)A 250V T85 25E3
16A 125V/250VAC T105

(G) Rating:
6(4)A 250V T125 5E4
6A 125V/250VAC T105
6A 125VAC 1E4

Mechanical life: 1E6 cycles
In-house test

Please check with our sales department the gold contacts possibilities we produce.

RL-61

RL-61	D	BK/BK	P8	O	K

Function		Cap colour / Housing	
D	(ON)-OFF 2P	WT	White
E	ON-(OFF) 2P	BK	Black
F	(ON)-ON 3P	GE	Grey

Terminals



















Lever Type

0	Not Applicable
1	28
2	32.8
3	3.1 23.7
4	12
5	25
6	51
7	15
8	55
9	40
10	28
11	45
12	36.5
13	22
14	24.4 R2.5 4.1
15	24.7 14.8
16	31 12.6
17	27.2 15.4
18	24.5
19	60
20	35
21	28.5 17
22	30.1 17.2
23	17
24	28.1 16.8
25	17.5

Operating Force	
Q	80 g
K	60 ± 15 gf
L	100 ± 20 gf
M	150 ± 30 gf
N	250 ± 40 gf
X	300 ± 50 gf
Y	400 ± 50 gf
Z	500 ± 50 gf