





IEC FUSED INLET COMBINATION OF SWITCH

SPECIFICATION:

1. Rating: 10A 250VAC
2. Insulation resistance: DC 500V 100MΩ(min)
3. Dielectric strength: 2000 VAC/1 minute
4. Housing material: nylon # 66 UL 94V-2 or 94V-0
5. Safety approval:



**RLN-10F**

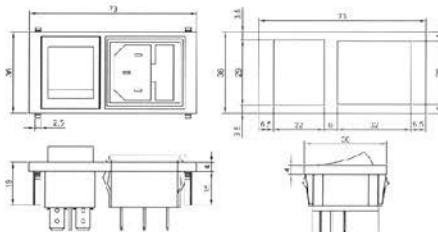

RLN-10F	0	1	P8
	Fuse	Combination of Switch	Terminals
	0 W/O Fuse	0 W/O Switch	 (P1)
	1 1 Fuse	1 S.P. Switch	
		2 D.P. Switch	 (P8)
		3 D.P. Red Neon S.W.	
		4 D.P. Green Neon S.W.	
		5 S.P. Red Neon S.W.	