




IEC FUSED INLET COMBINATION OF SWITCH

SPECIFICATION:

1. Rating: 10A 250VAC
2. Insulation resistance: DC 500V 100MΩ (min)
3. Dielectric strength: 2000 VAC/1 minute
4. Housing material: nylon # 66 UL 94V-2 or 94V-0
5. Safety approval:



RL-10-1FS

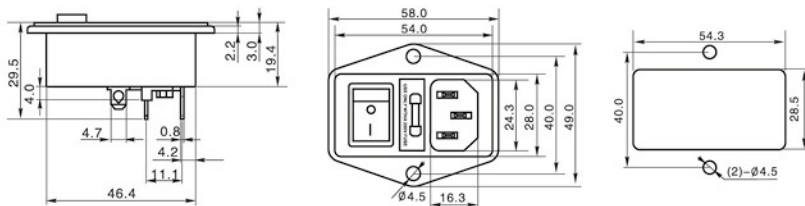

RL-10-1FS	0		1		P8
Function	Fuse		Combination of Switch		Terminals
FS	0	W/O Fuse	0	W/O Switch	
⋮	1	1 Fuse	1	S.P. Switch	
1.0 1.0 mm.			2	D.P. Switch	
F()			3	D.P. Red Neon S.W.	
1.5 1.5 mm.			4	D.P. Green Neon S.W.	
2.0 2.0 mm.			5	S.P. Red Neon S.W.	