




IEC FUSED INLET COMBINATION OF SWITCH

SPECIFICATION:

1. Rating: 10A 250VAC
2. Insulation resistance: DC 500V 100M $\Omega$  (min)
3. Dielectric strength: 2000 VAC/1 minute
4. Housing material: nylon # 66 UL 94V-2 or 94V-0
5. Safety approval:



**RLN-10F-2**

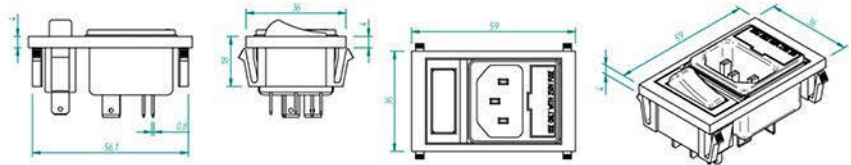

RLN-10F-2		0	1	P8
		Fuse	Combination of Switch	Terminals
0	W/O Fuse	0	W/O Switch	 (P1)
1	1 Fuse	1	S.P. Switch	
		5	S.P. Red Neon S.W.	 (P8)